



Blackberry Curve 9300 Keyboard Replacement

Replace keyboard for sticky or missing keys.

Written By: Rory Stothers



INTRODUCTION

This guide is designed to help consumers replace their Blackberry Curve 9300 keyboard.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)



PARTS:

- [Blackberry Curve 9300 Keyboard](#) (1)
-

Step 1 — Battery



- Place your Blackberry face down in front of you.

Step 2



- Locate the indent on the bottom of the back cover.
- Use your fingernail to lift and remove the back cover.

Step 3



- From the top, use your fingernail to lift and remove the battery.

Step 4 — Keyboard



- Use the T6 Torx screwdriver to unscrew the two 5mm screws highlighted.

Step 5




- Place the phone face up and use tweezers to securely grip and lift the screen upwards.

Step 6



- Use your prying tool to lift the bottom edge of the front cover.

Step 7

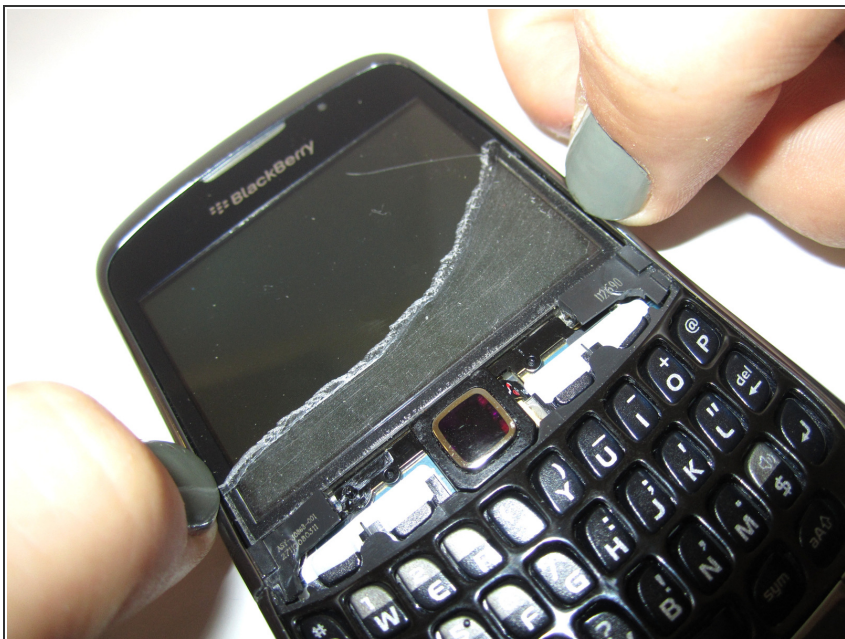

- Use your nails to unclip sides of frame from the phone.

Step 8



- Lift and remove frame.

Step 9



- Lift and remove keyboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-18 11:42:18 PM.